

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

19 JUL 2004
PC 02 / 0 2 4 1 3

REC'D 28 MAR 2003

WIPO PCT

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Saab Automobile AB, Trollhättan SE
Applicant (s)

(21) Patentansökningsnummer 0200093-3
Patent application number

(86) Ingivningsdatum 2002-01-11
Date of filing

Stockholm, 2003-03-17

För Patent- och registreringsverket
For the Patent- and Registration Office



Sonia André

Avgift
Fee

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

PATENT- OCH
REGISTRERINGSVERKET
SWEDEN

Postadress/Address
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 86
08-666 02 86

Ink t. Patent- och reg.verket

2002-01-11

I Huvudfaxen Kassan

VEHICLE CONTROL SYSTEM AND METHOD OF CONTROLLING SUCH

The present invention relates to a vehicle control system and method of controlling such, and in particular to a new vehicle control system capable of controlling a number of controllable motor vehicle subsystems (30-80) according to a number of preset vehicle operating modes.

Background of the Invention

In recent years, improvements in electrical and electronic components have increased their reliability and acceptance in the hostile motor vehicle environment. The electronic component is often a microprocessor, which introduces the versatility of program control into operating subsystems of a motor vehicle.

One operating subsystem, which has been substantially taken over by electronic or computer control is the engine operating or control subsystem. Computer control of internal combustion engines has been effectively mandated by the precision required to meet fuel efficiency and environmental protection requirements and the continuing demand for superior vehicle performance. Today, many vehicles can be bought in several models with characteristics that differ from each other, even though they are based on substantially the same hardware. The only difference lies in software related settings for engine characteristics and the like, and it is not unusual that the same engine hardware is used for models having an engine power that varies within a range of up to 30 kW or more. However, high power outtake is from an engine often results in increased wear of the engine components, such that the potential use of certain high performance vehicles sometimes has to be limited.

Other examples of motor vehicle operating subsystems, which have been enhanced by the improved control possible by using electronic and electrical control systems include anti-lock brakes, active and/or adjustable suspension subsystems, power assisted steering, traction control subsystems, entertainment subsystems, and comfort/convenience subsystems.

While operation of the noted, as well as other vehicle operating subsystems has been improved by the conversion to electrical and electronic control, each known operating subsystem has been developed as a substantially autonomous, stand-alone entity. Operating characteristics of such autonomous subsystems often can be adjusted during production of a

Ink. t. Patent- nach dem Inhalt

2002-01-11

2

Huvudfoxen Krossen

motor vehicle and, to a much more limited extent, after production by a vehicle dealer or customer. Unfortunately, by-in-large the operating characteristics of such autonomous subsystems are fixed at production and can only be changed by replacement or retrofitting of a new autonomous subsystem.

5

Examples of vehicle operating subsystems which can be adjusted after production include: some suspension subsystems which can be adjusted, for example among hard, normal and soft settings by the vehicle operator; engine control subsystems which can be adjusted between economy and power settings; traction control subsystems which can be adjusted between four-wheel drive and two-wheel drive; and, comfort/convenience subsystems which can be set to preposition a seat, steering wheel and the like for one or more operators.

10

15

US 5,091,856, Hitachi Ltd, discloses the use of a system manager for controlling all such subsystems in a vehicle according to personalized settings. The system rely upon that each driver of the vehicle has an identification card, which is read and identified by the system manager. To personalize the vehicle each driver has to make his/her own choice for each subsystem. The system also gives the driver the possibility to select the appearance of the dashboard, by use of a display type dashboard.

20

US 5,513,107, Ford Motor Company, discloses the use of a vehicle controller for controlling the subsystems in a vehicle according to preset operating modes. Parameters for operation of a number of vehicle operating subsystems are stored in the vehicle controller and selected to control and configure the operating subsystems. Control and configuration can be based on individually recognized operators of the vehicle, or an operating mode can be selected for the vehicle. For example, sport, cruise, luxury, off-road or other performance modes can be set up and selected. If a vehicle is to be operated by an authorized person who is not a recognized operator or is not authorized to select a mode of operation, default operating characteristic parameters are stored and selected. If the authorized person is to be restricted in the possible operation of the vehicle, a further set of limited operating characteristic parameters are stored and selected, preferably by entry of control signals corresponding to a security code. For example, if a valet is parking the vehicle, the limited operating parameters are selected. For security purposes, the limited operating parameters can be invoked after a defined period of time.

25

30

2002 -01- 1 1

Huvudfaxen Kassen

3

US 5,525,977. Prince Corp, discloses a personalization system for vehicles that uses a CD player and a keyless entry transmitter. The CD player outputs audible prompting signals including accessory operation choices. The driver selects accessory operation by pressing the "LOCK" or "UNLOCK" switch on the keyless entry key fob following an associated audio prompting signal. A controller coupled to the CD player receives a selection signal from the keyless entry key fob and associates the receipt of the selection signal with an index corresponding to the audio prompting signal last output by the CD player. The controller controls accessory operation according to the accessory options selected responsive to the audible prompting signal.

US 6,205,374, Mazda Motor Corporation, discloses a personalization system for vehicles, wherein the settings of the vehicle subsystems are set by, the sales agent, to meet preference of driver, a driver's taste, driving condition, driving circumstances and the like

US 6,253,122, Sun Microsystems Inc, discloses a dashboard for a vehicle, comprising a monitor, which displays graphical images depicting dashboard instruments. The images displayed to the driver are determined by the virtual dashboard application, and not by the monitor itself. The displayed images are user-selectable so that they can be varied to suit the preferences of different drivers. The driver may alternately select different groups of images to view on the monitor using touch screens or speech commands.

EP1034470 B1, BMW, discloses user interface for a feature/accessory control system of a vehicle, which system comprises a device for controlling a display screen with an actuating element which can be rotated about a longitudinal axis and moved in the direction of the longitudinal axis, enabling a point of a menu structure consisting of menu, partial menus, functions and/or function values to be selected, and which can be represented as an optically highlighted field in the display screen. The actuating element has an initial position and can describe with relation thereto an additional movement with two additional degrees of freedom. The additional movement of the actuating element enables a field arranged in a marginal region (2) of the display screen and associated with a point of the menu structure to be selected. The rotary/longitudinal movement of the actuating element enables a subordinate field of the menu structure associated with the field arranged in the marginal region of the display screen to be selected in the central region (3) of the display screen enclosed by the marginal region.

Throughout this application the term vehicle is intended to include all possible vehicles on which the invention may be applied, and especially all types of automobiles.

5 Summary of the Invention

The object of the invention is to provide a new vehicle control system and method of controlling such, which system and method overcomes one or more drawbacks of the prior art. This is achieved by the system as defined in claim 1, and by the method as defined in
10 claim 21.

One advantage with such a vehicle control system with limited operating modes is that the vehicle characteristics for such modes can be set to more extreme levels without the risk of damage to the vehicle, due to non-suitable use of the vehicle.

15

Another advantage is that non-safe use of the vehicle due to over-load or high speed in non-suitable modes is prevented, without limiting use of the vehicle for carrying heavy loads or for high speed driving under suitable conditions in appropriate modes. One and the same vehicle can therefore be mode-transformed such that optimum characteristics are set
20 according to the current driving circumstances, whereby maximum versatility and safety is achieved.

Another advantage is that the vehicle control system automatically adapts the performance of the vehicle to a suitable operating mode.

25

Embodiments of the invention are defined in the dependent claims.

30

Brief Description of the Drawings

The invention will be described in detail below with reference to the drawings, in which

2002 -01- 1 1

Huvudfaxen Kassar

5

Fig. 1 schematically shows one embodiment of a vehicle control system according to the present invention in a vehicle.

Fig. 2a schematically shows the settings of a vehicle in sport mode.

Fig. 2b schematically shows the settings of a vehicle in off-road mode.

Fig. 2c schematically shows the settings of a vehicle in heavy load mode.

Fig. 3a is a schematic view of a dashboard-image according to one embodiment of the invention

Fig. 3b shows a schematic example of a leisure mode adapted dashboard-image.

Fig. 3c shows a schematic example of a sport mode adapted dashboard-image.

Fig. 3d shows a schematic example of an off-road mode adapted dashboard-image.

Fig. 3e shows a schematic example of a parking mode adapted dashboard-image.

Fig. 4 schematically shows the menu options in top menu state of the sport mode.

Fig. 5 schematically shows an input arrangement according to one embodiment of the invention.

Fig. 6 shows an example of a menu selection process according to one embodiment of the invention.

Detailed Description of Preferred Embodiments

One basic feature of the present invention is to further develop the ideas from US 5,513,107, relating to configuration of a vehicle according to a number of preset operating modes. There are two main reasons why selectable configuration of a vehicle by preset operating modes is

preferred. Firstly, too many individual configuration possibilities are frustrating and too complicated for the majority of the drivers of such vehicles. Secondly, preset operating modes leaves the control of the vehicle performance and characteristics to the manufacturer, whereby a certain security level, road performance, manoeuvrability and the like can be guaranteed.

5 Throughout this application, the term operating mode is defined in that any two operating modes are distinguished from each other, in that the mode specific settings differ for at least two separate vehicle subsystems.

10 Figure 1 schematically shows one embodiment of a vehicle control system 10 according to the present invention, comprising a central control unit 20, a number of controllable subsystems 30 – 80 represented by a chassis control system 30, an engine control system 40, a power train control system 50, a steering control system 60, a climate control system 70, and a seating control system 80. Naturally, a vehicle control system 10 according to the invention does not
15 need to comprise all these subsystems, and other subsystems may be included, as will be clear below. Each of said subsystems 30 – 80 may, as been discussed above, be set into a number of operating modes, which in this specific invention are adapted for optimum performance in the different preset operating modes of the vehicle.

20 The central control unit 20 basically is a computer comprising a processor for execution of the different operating mode selections and memory means for storing operating mode related settings. In a preferred embodiment the central control unit 20 also is a central component in a vehicle infotainment system, by which the driver/passengers of the vehicle can access entertainment in the form of music, video, games and the like, as well as information in the form of e-mail, internet, mobile phone and the like. In such infotainment systems, one or
25 more displays and input devices are connected to the central control unit 20. Furthermore, the driver interface of the vehicle control system 10 is preferably integrated as a part of the vehicle infotainment system, which will be discussed in detail below. All subsystems 30-80 are connected to the central control unit 20, such that the central control unit 20 can set the required parameters of the individual subsystems 30-80 to the values that corresponds to the
30 selected operating mode. In an alternative embodiment, one or more subsystem control systems are integrated with the central control unit 20, whereby the central control unit directly controls the properties of the subsystem.

2002 -01- 1 1

Huvudfaxen Kassan

7

The chassis control system 30 is arranged to control adjustable chassis parameters of the vehicle in accordance with the selected operating mode or personal selections if available. Controllable chassis parameters comprise suspension parameters like damping and stiffness, vehicle ground clearance, horizontal leveling, wheel track and the like. By controlling these parameters the chassis may be adopted for optimum performance in different driving situations, or operating modes, as will be discussed below.

The engine control system 40 is arranged to control the performance of the engine in the vehicle with respect to parameters such as power, torque, fuel consumption, emission level, duration and the like.

The power train control system 50 is arranged to control adjustable power train parameters of the vehicle in accordance with the selected operating mode or personal selections if available. Controllable power train parameters comprise gearbox operation parameters, two/four-wheel drive selections, anti-spin settings and the like.

The steering control system 60 is arranged to control adjustable steering parameters of the vehicle in accordance with the selected operating mode or personal selections if available. Controllable steering parameters comprise degree of power assistance, steering wheel gear ratio and the like.

The climate control system 70 is arranged to control the climate in the vehicle.

The seating control system 80 is arranged to control adjustable seating parameters of the vehicle in accordance with the selected operating mode or personal selections if available. Controllable seating parameters comprise personalized comfort parameters for adjustment of individual seats, parameters for automatic adjustment of the cargo space by moving or folding seats, and parameters defining mode related transformation of seats into comfort mode, bucket mode or the like.

The vehicle control system 10 further comprises a driver interface 90, which preferably comprises an input arrangement 92 and an output arrangement 94. The input arrangement 92 is e.g. formed by one or more push buttons, a joystick type controller, speech recognition, or any combination thereof. The output arrangement 94 is e.g. formed of a graphical display,

Ink. t. Patent- och reg.verket

2002 -01- 1 1

8

Huvudfaxen Kasson

indicator lamps or diodes, sound/voice messages, or any combination thereof. A preferred embodiment of the driver interface is described in detail below.

Furthermore the vehicle control system 10 comprises a number of sensors 100 -- 130 for
5 registering current operating conditions. In this first embodiment the sensors 100 -- 130 are represented by a number of load sensors 100, a towing sensor 110, a speed sensor 120, and a tilting sensor 130. Hence, the current operating conditions registered comprise load, towing, speed and tilting of the vehicle. Preferably, there is one load sensor 100 associated with the wheel suspension of each wheel, for accurate monitoring of the load in the vehicle. The load
10 sensors 100 register the load both when the vehicle is standing still and when it is in motion. The towing sensor 110 is a sensor that is arranged to recognize if the vehicle is used for towing a trailer or the like, and it may give a response signal to the central control unit 20, e.g. in response to the force applied to a towing hook, if a detachable towing hook is arranged in position, if a trailer is electrically connected to the vehicle or the like. The speed sensor 120
15 gives a signal corresponding to the actual speed of the vehicle. The tilting sensor 130 registers tilting of the vehicle.

Additionally, the vehicle control system 10 may comprise a number of controllable accessory systems 140 -180, herein represented by an electrically foldable towing hook 140, an
20 electrically foldable roof rack 150, electrically extendable external rear view mirrors 160, electrically adjustable spoilers and body skirts 170, and electrically foldable chassis protection rails or bumpers 180. The electrically foldable towing hook 140 has two modes of operation: a towing mode, and a hidden mode. In the towing mode the hook may be used for towing a trailer or the like, whereas it is prevented from use in the hidden mode. In a similar fashion
25 the electrically foldable roof rack 150 has a loading mode and a hidden mode. The electrically foldable roof rack 150 can further be equipped with automatic load fastening means, which preferably can be adjusted according to a number of memorized positions. Furthermore, the electrically foldable roof rack 150 may be used as carrier for supplementary driving lamps. The electrically extendable external rear view mirrors 160 can be extended to achieve
30 acceptable rear view when towing of a wide trailer, such as a caravan or the like. The electrically adjustable spoilers and body skirts 170 are used to change the aerodynamic characteristics of the vehicle depending on operating mode and speed. The electrically foldable chassis protection rails or bumpers 180 are situated underneath the vehicle and have

two modes of operation: a hidden mode and a protection mode. In the protection mode the chassis protection rails protects the chassis from damage during off-road conditions.

- 5 As mentioned above the vehicle control system 10 is intended for use in at least two preset operating modes. Examples of such modes are, **Leisure, Economy, Sport, Off-road, Heavy load, Zero emission, and Parking.** The basic features for each such mode are:

Leisure

- 10 May also be referred to as normal driving mode, and is characterized by a high comfort level in all senses, such as comfortable suspension and smooth automatic transmission.

Economy

- 15 All adjustable parameters are optimized to achieve the lowest possible fuel consumption. The vehicle control system 10 may instruct (guide) the driver how to drive to achieve reduced fuel consumption.

Sport

- 20 The characteristics of the chassis settings are changed to improve the road handling characteristics, e.g. setting the suspension in a stiff state, activating active anti-roll stabilization, and the like. The transmission and engine-settings are changed to achieve increased power and rapid acceleration. The aerodynamic characteristics are improved by changing the settings of the electrically adjustable spoilers and body skirts 170, and/or by tilting the body of the vehicle. (fig. 2a)

25 *Off-road*

- 30 The chassis is raised to increase the ground clearance of the vehicle, and four-wheel drive is activated. The transmission and engine-settings are changed to achieve increased torque and low speed capabilities. The electrically controllable chassis protection rails or bumpers 170 are set in the protection mode. (fig. 2b)

Heavy load

- The suspension is adjusted according to the load, the transmission and engine-settings are changed to achieve increased torque, and four-wheel drive is activated. (fig. 2c)

2002 -01- 1 1

Huvudfaxen Kassar

10

Zero-emission

Measures are taken such that the vehicle does not emit any exhaust fumes

Parking

- 5 Depending on the type of vehicle the chassis is raised or lowered to facilitate getting in and getting out of the vehicle.

10 It should be understood that the features of the different modes might be altered and adapted to the vehicle in which the vehicle control system 10 is arranged. Furthermore, all proposed modes are not necessarily available in vehicles equipped with the vehicle control system 10 according to the invention, i.e. the number of modes that are available in a vehicle is adapted to the vehicle type. In addition to the functional mode features proposed above, additionally features may be altered between the mode transformations, such as the appearance, and the sound impression of the vehicle.

15

In a preferred embodiment of the present invention, the central control unit 20 is arranged to limit possible mode selections in accordance with a number of preset operation rules to assure maximum performance and safe operation of the vehicle in the different modes. Examples of such rules are:

20

- a. Sport mode is not selectable when the load registered by the load sensors 100 exceeds a preset load limit,
- b. Sport mode is not selectable when the towing sensor 110 indicates that there is a trailer or the like hooked onto the towing hook. When the vehicle is equipped with an electrically foldable towing hook 130, sport mode is not selectable when the hook is in towing position. Similarly the electrically foldable towing hook 130 cannot be set in towing position, when sport mode is selected.
- c. The electrically foldable roof rack 150 is not selectable in sport mode.
- d. Heavy load mode is automatically selected when the load registered by the load sensors 100 exceeds a preset load limit.

25

30

2002 -01- 1 1

Huvudfaxen Kassar

11

e. Heavy load mode is automatically selected when the towing sensor 110 indicates that there is a trailer or the like hooked onto the towing hook. When the vehicle is equipped with an electrically foldable towing hook 140, heavy load mode is automatically selected when the hook is set in towing position.

5

f. In off-road mode, the vehicle is limited to use below a predefined speed limit, and if the speed registered by the speed sensor 120 reaches the speed limit, then the vehicle control system 10 prevents further acceleration.

10

g. Off-road mode is locked when the tilting angle registered by the tilting sensor 130 exceeds a predetermined value that indicates that the vehicle is in an advanced off-road situation.

15

h. Sport mode is not directly selectable from off-road mode, i.e. the vehicle has to be set in another non off-road mode before sport mode is selected.

One major advantage with limited operating modes is that the vehicle characteristics for such modes can be set to more extreme levels without the risk of damage to the vehicle, due to non-suitable use of the vehicle. Another advantage is that non-safe use of the vehicle due to over-load or high speed in non-suitable modes is prevented, without limiting use of the vehicle for carrying heavy loads or for high speed driving under suitable conditions in appropriate modes.

25

Rules a and b, both limits non-suitable use of the vehicle in the sport mode, with regard to the total load of the vehicle. By setting the over all load limit for the sport mode to a level that e.g. corresponds to a load of two persons for a conventional middle class automobile, the subsystems settings can be set to a level that corresponds to the performance of a two seated sport car. If such extreme settings were available under any conditions, there is an obvious risk that the vehicle could be damaged, especially the engine and the power train. This may be compared with conventional middle class automobiles available as extreme sport versions, which must be kept at a "safe level" to prevent damage on the vehicle, whereby top performance is excluded at the same time as use for carrying heavy loads and/or towing trailers or the like is permanently prevented by model regulations or the like.

30

2002 -01- 1 1

Huvudfaxen Kassan

12

Rule c is mainly intended for limiting the possibility of loading objects on the roof of the vehicle. This is highly undesirable, as the high forces that they may be subjected to in the sport mode may cause the objects to break loose. A roof rack further has a negative effect on the aerodynamics of the vehicle, especially if it is used for carrying a load.

5

Rules d and e promotes optimum performance when the vehicle is used for carrying heavy loads and/or is used for towing. By automatically selecting the high load mode under conditions of heavy load, excessive wear and risk for damage of the engine and power train is prevented, at the same time as the best possible driver comfort is achieved in terms of high low speed power, road stability and the like. As indicated in rule e, the electrically foldable towing hook 130 preferably is exclusively associated with this mode, whereby use of the vehicle for towing in other modes is effectively prevented.

10

As the off-road mode is intended for use under low speed conditions where increased accessibility is needed, and therefore has reduced high-speed characteristics, rule f prevents use of off-road mode at speeds exceeding a predetermined speed limit. Rule g prevents accidental switching from off-road mode to a non-off-road mode in situations where off-road mode is required to maintain accessibility. If sport mode could be selected directly from off-road mode there is a risk that the sport mode is selected when the road conditions are too rough resulting in damage on the chassis and/or spoilers. Therefore, rule h prevents such direct switching and an intermediate mode, with respect to ground clearance, has to be selected before sport mode is accessible. If the road conditions then are too rough, the intermediate mode gives the driver a second chance to recognize this and to return to off-road mode, if necessary.

20
25

In another embodiment of the invention, the different modes may comprise one or more parameter-adapted modes associated with the operation rules, by which the selected mode is adapted to different parameters such as load, speed and the like. As an example, rule a may include automatic selection among two or more load-adapted sport modes, each associated with a preset load-range, such that the characteristics of the sport mode automatically is adapted to the actual load in the vehicle.

30

In alternative embodiments other subsystems, sensors, accessory systems may be comprised in the vehicle control system 10 of the invention. In a basic embodiment of the vehicle control

Ink. t. Patent- och register

2002 -01- 1 1

13

Huvudfoxen Kassar

system 10, it is capable of controlling a number of controllable motor vehicle subsystems 30-80 according to at least two preset vehicle operating modes, it comprises at least one sensor 100-130 for registering current operating conditions, and the central control unit 20 is arranged to limit access to at least one of the preset operating modes in response to an output value from at least one such sensor 100-130.

Driver interface:

10 To further prevent use of the vehicle in a non-suitable operating mode, to simplify usage of the vehicle in the active operating mode, and to keep a high level of security, it is of great importance that the driver of the vehicle is informed and made aware of the active mode in an intuitive and clear manner. To meet these requirements, the output arrangement 94 of the driver interface 90 preferably is fully integrated with the dashboard of the vehicle.

15

In a preferred embodiment of the invention the dashboard is formed by a graphical-display, such as a LCD, EL, CRT or Plasma-display, on which the normal meters and gauges, such as speedometer, revolution counter, and fuel gauge, are shown as graphical elements in mode-adapted dashboard-images that are easy to distinguish from each other. Figs. 3b to 3e shows schematic examples of four mode-adapted dashboard-images 300, whereas the image shown in fig 3a is a schematic view used for illustrative purposes, 3b is adapted for Leisure mode, fig. 3c for Sport-mode, fig. 3d for Off-road mode, and fig. 3e for Parking mode.

20

To facilitate dashboard intelligibility when switching modes, a unitary structure is preserved throughout the different mode adapted dashboard-images 300, as can be seen in figs. 3a to 3e.

25

As is shown in fig. 3a, the dashboard-image 300 is similar in design to a conventional dashboard, and it is basically comprised of a centrally arranged main section 310 for displaying vital driving related information, and two submenu/information areas 320a, 320b adjacent to the main section 310. More specifically the main section 310 comprises a large substantially circular analogue meter 312 for displaying the speed (or rpm in sport mode), a gear field 314 for displaying selected gear, and a misc. info field 316 for displaying other information and important alerts. The main section 310 further comprises six selection fields 340 a-f disposed along the perimeter, three shortcut fields 350 a-c at the lower section, and a text field 360 for displaying the active mode in text format. The selection fields 340 form a

30

part of a menu system used for controlling the features of the vehicle control system 10, and the location relative the center of the main section 310 indicates how the selection field 340 is selected with the input arrangement 92 of the driver interface 90. The mode-adapted dashboard images are further adapted to simplify usage of the vehicle in the active operating mode in that they show mode-specific meters and available choices.

Fig. 3b shows an example of a leisure mode dashboard-image 300. Herein the analogue meter 312 is used for displaying the speed, the gear field 314 displays the selected gear by highlighting the appropriate symbol, and the misc. info field 316 is used for displaying the time, the mileage and, when necessary, important alerts. The four selection fields 340 a-d are used to access the submenus of the audio entertainment, mobile phone, climate control, and navigation systems, respectively. In the top menu state, the function associated with the shortcut fields 350 a-c is direct selection of the alternative operating modes, sport, off-road, and heavy load, respectively, but when any of the selection fields 340 a-d is selected their functions alter, which will be described in detail below. Furthermore, in the top menu state, the submenu/information areas 320a, 320b are only used for displaying outdoor temperature and fuel level, respectively, but the large unused areas are used for displaying submenus when any of the selection fields 340 a-d is selected.

Fig. 3c shows an example of a sport mode dashboard-image 300. Unlike in leisure mode, the analogue meter 312 is used for displaying the rpm, the gear field 314 displays the manually selected gear as a figure, and the misc. info field 316 is used for displaying the speed in figures and, when necessary, important alerts. Furthermore, the selection fields 340 e and f display how manual gear shifting is performed, and in this mode they refers to gear-shifting buttons on the steering wheel. The function associated with the shortcut fields 350 a-c is direct selection of the alternative operating modes, leisure, off-road, and heavy load, respectively.

Fig. 3d shows an example of an off-road mode dashboard-image 300. Like in leisure mode, the analogue meter 312 is used for displaying the speed, but with a reduced speed interval as the mode is restricted for use under a predefined speed limit. The gear field 314 displays the selected gear by highlighting the appropriate symbol, and the misc. info field 316 is used for displaying a compass and, when necessary, important alerts. As above, the function associated with the shortcut fields 350 a and c is direct selection of the alternative operating modes.

2002 -01- 1 1

Huvudfaxen Kessari

15

leisure, and heavy load, respectively, but the shortcut field 350 b is not used, as operation rule h does not permit direct selection of sport mode from off-road mode. Furthermore, the areas normally occupied by the selection fields 340 c and f are used for displaying tilting meters.

5 Fig. 3e shows an example of a parking mode dashboard-image 300. To utilize a larger section of the dashboard-display for infotainment purposes or the like, the main section 310, now in the form of an infotainment window 315, is expanded at the sacrifice of the submenu/information areas 320a, 320b, and the submenus are now displayed direct in the infotainment window 315. As will be discussed below, a large number of infotainment
10 features are available to the driver in parking mode and selection fields 340 c and f plus additional selection field 340g are used to provide access to these features. Additional selection field 340 is used to access different non-mode specific features and accessories, such as the electrically foldable towing hook and the like.

15 In alternative embodiments of the driving mode dashboard-images 300, it is possible to access to the non-mode specific features and accessories, but the features or accessories that may be selected in the different modes are restricted by the operating rules a-f.

20 To further distinguish the different mode adapted dashboard-images 300, they are preferably designed using different color-schemes and background patterns. In one embodiment the leisure mode dashboard-image 300 has a black background and yellowish-red instruments like a conventional dashboard, the sport mode dashboard-image 300 has a blue background, and the off-road mode dashboard-image 300 has a green background, c.g.

25 Fig. 4 schematically shows the menu options for the selection fields 340 a-f and the shortcut fields 350 a-c in top menu state of the sport mode. The four selection fields 340 a-d are used to access the submenus of the audio entertainment, mobile phone, climate control, and navigation systems, respectively. If one of the selection fields 340 a-d is selected, the associated submenu appears in the information field, and further selections can be made in the submenu.

30 As mentioned above, the input arrangement 92 can be of several different types. In one preferred embodiment, shown in fig. 5, the input arrangement 92 is suitable to arrange in the center console and comprises an actuator of joystick type 400, a rotary selector 410 and a

2002 -01- 1 1

Huvudfaxen Kessan

16

push button 420 both arranged on the actuator 400, and three shortcut keys 430 arranged in front of the actuator 400. To facilitate selection of selection fields under rough driving conditions, the actuator 400 is preferably guided to a number of perimeter positions corresponding to the selection fields of the main section. The input arrangement 92 may further comprise a number of steering wheel shortcut keys arranged on the steering wheel for direct access to important features.

Fig. 6 shows how a selection field is selected using the actuator 400, whereby a submenu appears in the information field 320b. The selection in the submenu is performed by the rotary selector 410 and the push button 420.

In one special embodiment, force-feedback controlled menu selection is utilized, whereby the actuator 400, by force-feedback, is prevented from movements in directions that not corresponds to an available selection field 340 a-f. In this way, the number of selection fields 340 a-f may vary between different operating modes and menu levels, and guided selection can be obtained for any number of selection fields 340 a-f along the perimeter of the main section 310.

20 *Virtual codriver:*

To further increase safe use of the vehicle, the control-unit 20 is programmed to limit the information that the driver may access depending on the driving situation. To achieve this, a number of access-limiting rules have been formulated, according to which the control-unit decides what information and features that are to be accessible in a specific situation. Examples of such access-limiting rules are shown in table 1.

Ink. t. Patent- och reg. verket

2002 -01- 1 1

17

Huvudfaxen Kassar

Table 1:

	Basic driving functions	Menu system	Mobile phone	E-mail	Infotainment
Parking mode	Yes	Yes	Yes	Yes	Yes
1 - 60 km/h Urban area	Yes	No	Yes	No	No
61-120 km/h small road	Yes	Yes	Yes	No	No
61-120 km/h freeway	Yes	Yes	Yes	Yes	No
121 -	Yes	No	No	No	No

- 5 In the table the different safety levels mainly depend on the speed and type of driving, but other important factors that may be introduced in the rules are weather conditions, visibility, restricted areas (close to schools etc, road sections with frequent accidents), traffic situation reports and the like.
- 10 Having thus described the invention of the present application in detail and by reference to preferred embodiments thereof, it will be apparent that modifications and variations are possible without departing from the scope of the invention defined in the appended claims.

Ink. t. Patent- och reg.verket

2002-01-11

Huvudfaxen Kaseri

18

CLAIMS:

1. Vehicle control system (10), capable of controlling a number of controllable motor vehicle subsystems (30-80) according to at least two preset vehicle operating modes, the control system comprises a central control unit (20) for controlling the motor vehicle subsystems (30-80), and a driver interface (90) with an input arrangement (92) and an output arrangement (94) for selecting operating mode, characterized in that it comprises at least one sensor (100-130) for registering current operating conditions, and that the central control unit (20) is arranged to limit access to at least one of the preset operating modes in response to an output value from at least one sensor (100-130).
2. Vehicle control system (10) according to claim 1, characterized in that it comprises at least one load sensor (100) for registering the load in the vehicle.
3. Vehicle control system (10) according to claim 1 or 2, characterized in that it comprises at least one towing sensor (110) arranged to recognize if the vehicle is used for towing a trailer or the like.
4. Vehicle control system (10) according to any of the claims 1 to 3, characterized in that it comprises at least one speed sensor (120) arranged to give a signal corresponding to the speed of the vehicle.
5. Vehicle control system (10) according to any of the claims 1 to 4, characterized in that it comprises at least one tilting sensor (120) arranged to register tilting of the vehicle.
6. Vehicle control system (10) according to any of the claims 1 to 5, characterized in that it comprises at least one controllable accessory system (140-180) and that the central control unit (20) is arranged to limit access to at least one of the preset operating modes in response to a mode of operation of at least one accessory system (140-180).

7. Vehicle control system (10) according to claim 6, characterized in that it comprises a controllable accessory system in the form of a foldable towing hook (140).
8. Vehicle control system (10) according to claim 6 or 7, characterized in that it comprises a controllable accessory system in the form of a foldable roof rack (150).
9. Vehicle control system (10) according to any of the claims 1 to 8, wherein one of the preset vehicle operating modes is a sport mode, characterized in that the sport mode is not selectable when the load registered by the load sensors (100) exceeds a preset load limit, nor when the towing sensor 110 indicates that there is a trailer or the like hooked onto the towing hook.
10. Vehicle control system (10) according to any of the claims 1 to 9, wherein one of the preset vehicle operating modes is a heavy-load mode, characterized in that the heavy-load mode is automatically selected when the load registered by the load sensors 100 exceeds a preset load limit, and when the towing sensor 110 indicates that there is a trailer or the like hooked onto the towing hook.
11. Vehicle control system (10) according to any of the claims 1 to 10, wherein one of the preset vehicle operating modes is an off-road mode, characterized in that the vehicle control system 10, in off-road mode, prevents further acceleration when the speed registered by the speed sensor 120 reaches a predefined speed limit, and that off-road mode is locked when the tilting angle registered by the tilting sensor 130 exceeds a predetermined value.
12. Vehicle control system (10) according to any of the claims 1 to 11, characterized in that the output arrangement (94) is integrated with a dashboard of display type, and in that the dashboard-image is mode-adapted for each preset operating mode.
13. Automobile, characterized in that it comprises a vehicle control system (10) according to any of the claims 1 to 12.

2002 -01- 1 1

Huvudfaxen Kassen

20

14. Driver interface (90) for controlling a vehicle control system (10), capable of controlling a number of controllable motor vehicle subsystems according to at least two preset vehicle operating modes, characterized in that it comprises a dashboard of display type arranged to display a dashboard-image, and in that the dashboard-image is mode-adapted for each preset operating mode.
15. Driver interface (90) according to claim 14, characterized in that each mode-adapted dashboard-image comprises centrally arranged main section (310) for displaying vital driving related information, and two submenu/information areas (320a, 320b) adjacent to the main section (310).
16. Driver interface (90) according to claim 15, characterized in that the main section (310) comprises a substantially circular analogue meter (312) for displaying the speed or RPM, a gear field (314) for displaying selected gear, a misc. info field (316) for displaying other information and important alerts, a number of selection fields (340 a-h) disposed along the perimeter of the main section (310), and three shortcut fields (350 a-c) at the lower section.
17. Driver interface (90) according to claim 16, characterized in that the selection fields (340 a-h) form a part of a menu system used for controlling the features of the vehicle control system (10), and the location relative the center of the main section (310) indicates how each selection field (340 a-h) is selected with an input arrangement (92) of the driver interface 90.
18. Driver interface (90) according to claim 17, characterized in that the input arrangement (92) comprises an actuator of joystick type (400), a rotary selector (410) and a push button (420) both arranged on the actuator (400), and three shortcut keys (430) arranged in front of the actuator (400).
19. Driver interface (90) according to claim 18, characterized in that the actuator of joystick type (400) is guided to a number of perimeter positions corresponding to the selection fields of the main section.

Ink. t. Patent- och reg.verket

2002-01-11

21

Huvudföreskriften

20. Driver interface (90) according to claim 19, characterized in that the actuator of joystick type (400) is guided by a force-feedback arrangement.

5 21. Method of operating a vehicle control system (10), capable of controlling a number of controllable motor vehicle subsystems according to at least two preset vehicle operating modes, the control system (10) comprises a central control unit (20) for controlling the motor vehicle subsystems, and a driver interface (90) for selecting operating mode, characterized by the step of, limiting possible mode selections in accordance with a number of preset operation rules.

10 22. Method according to claim 21, characterized by the step of registering current operating condition using at least one sensor (100-130), and in that at least one operation rule limit access to at least one of the preset operating modes in response to an output value from at least one sensor (100-130).

15

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
21

2002 -01- 1 1

Huvudfaxen Kassan

22

ABSTRACT

Vehicle control system (10), capable of controlling a number of controllable motor vehicle subsystems (30-80) according to at least two preset vehicle operating modes. The control
5 system comprises a central control unit (20) for controlling the motor vehicle subsystems (30-80), and a driver interface (90) with an input arrangement (92) and an output arrangement (94) for selecting operating mode. Furthermore, the control system comprises at least one sensor (100-130) for registering current operating conditions, and the central control unit (20) is arranged to limit access to at least one of the preset operating modes in response to an
10 output value from at least one sensor (100-130).

Fig. 3

11-01-02

4/9

Ink. t. Patent- och reg.verket

2002 -01- 1 1

Huvudfaxen Kassan

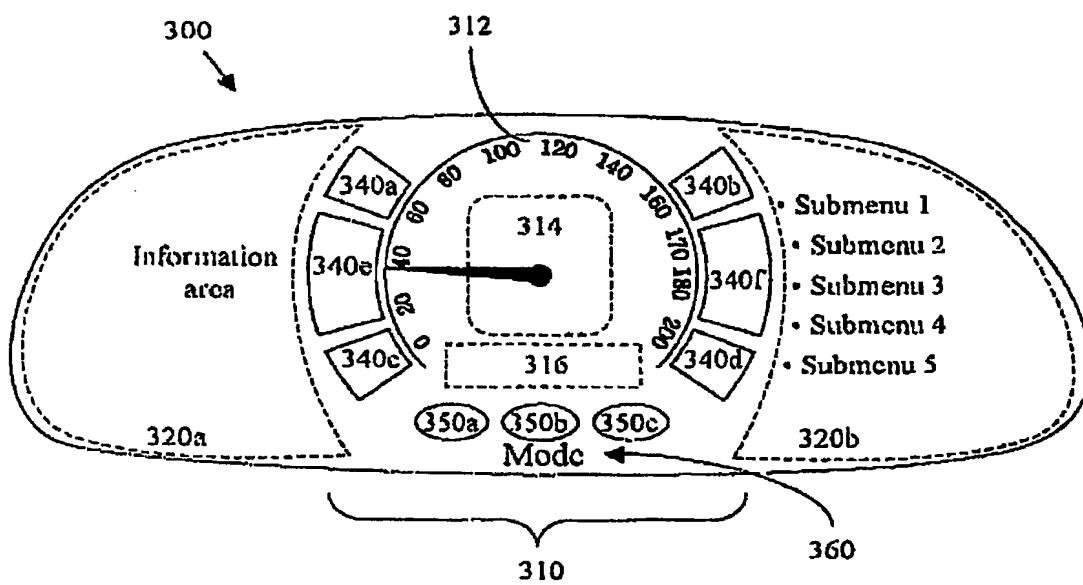


Fig. 3a

Ink. t. Patent- och reg.verket

2002 -01- 1 1

Huvudfaxen Kassen

5/9

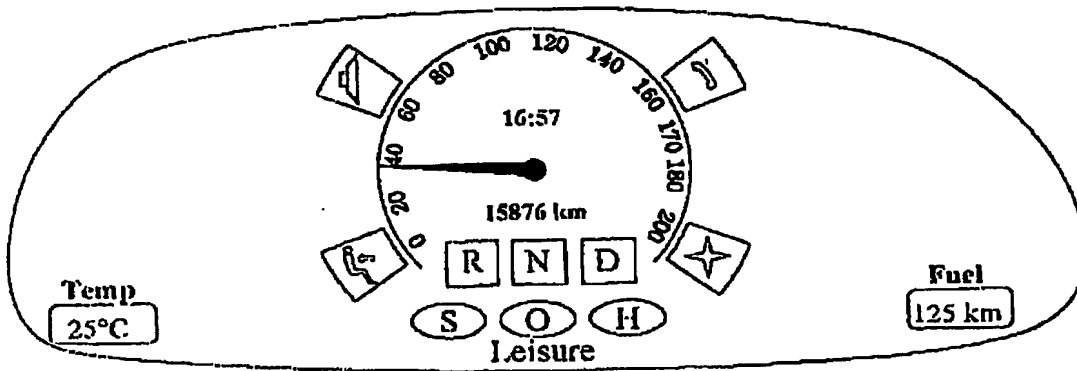


Fig. 3b

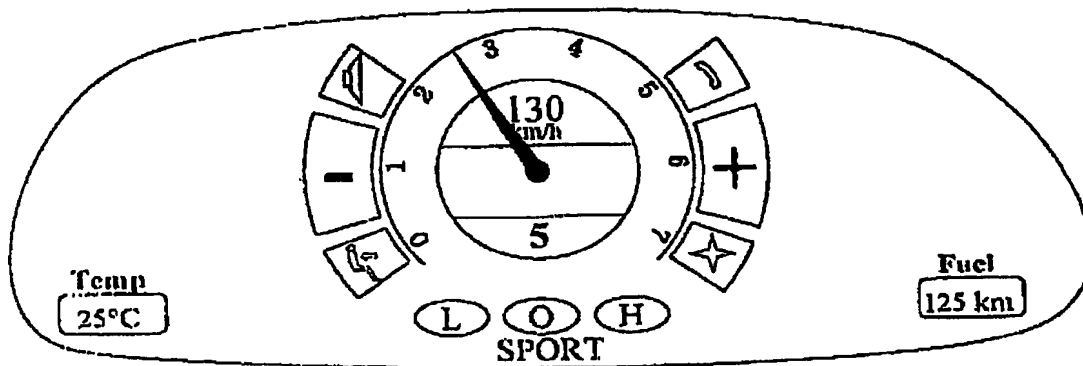


Fig. 3c

6/9

Ink. t. Patent- och reklambyrå

2002 -01- 1 1

Huvudfoxen Könsen

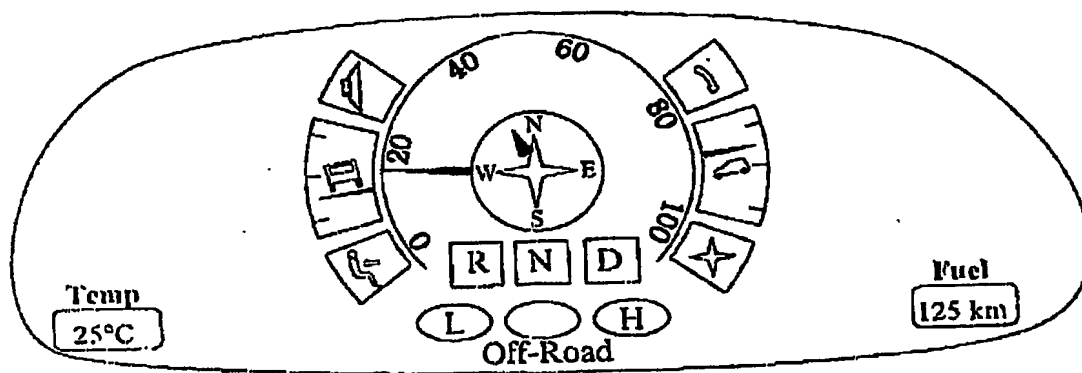


Fig. 3d

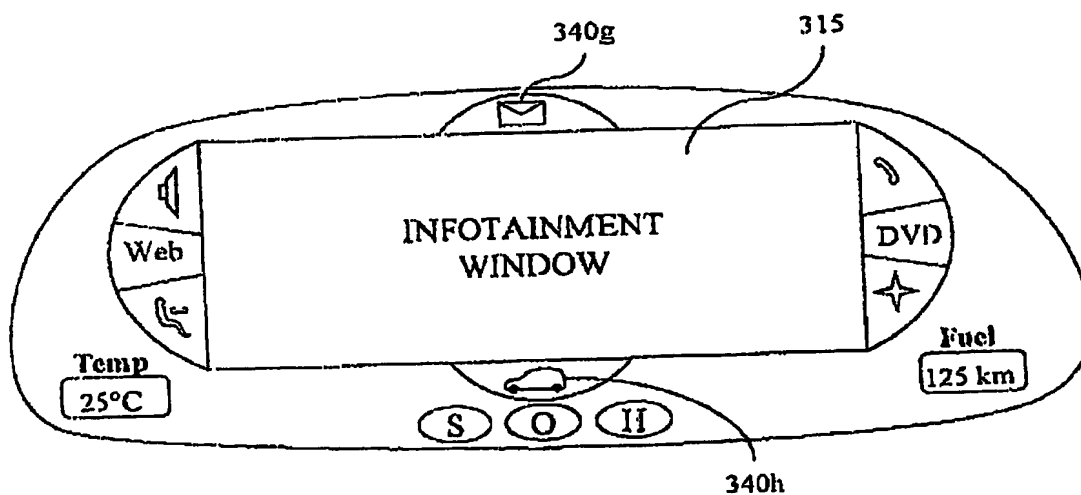


Fig. 3e

Ink. t. Patent- och reg. verkst

2002 -01- 11

Huvudföretag: Kässan

7/9

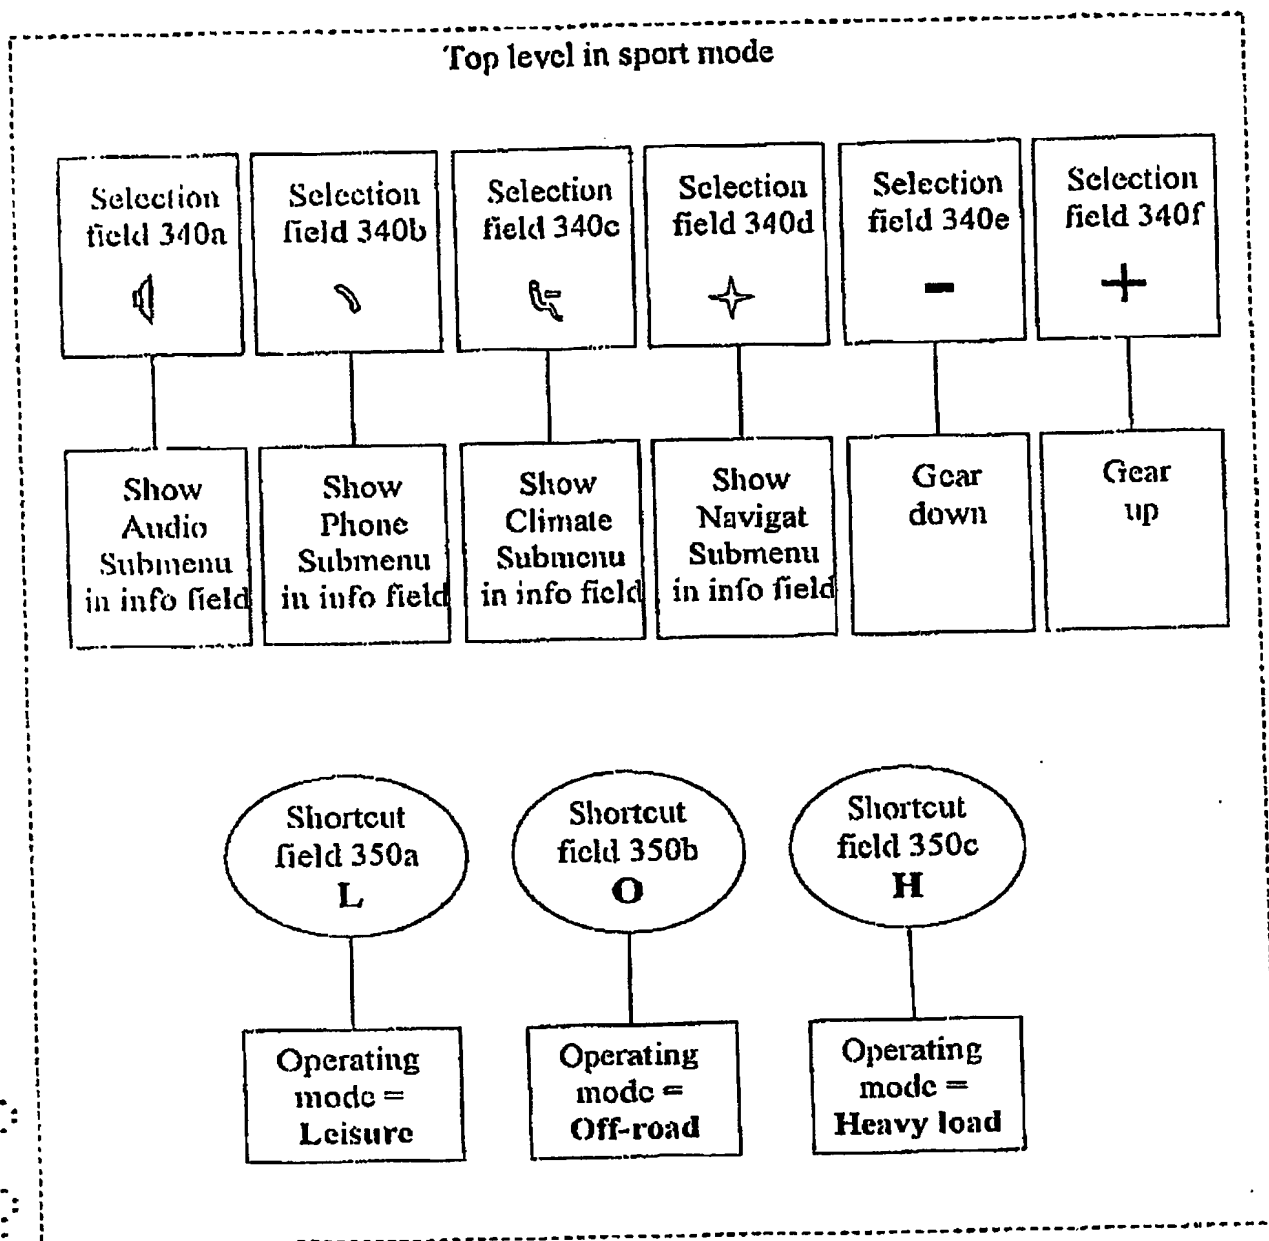


Fig. 4

Ink. t. Patent- och reg.verket

2002 -01- 1 1

Huvudfaxen Kassen

9/9

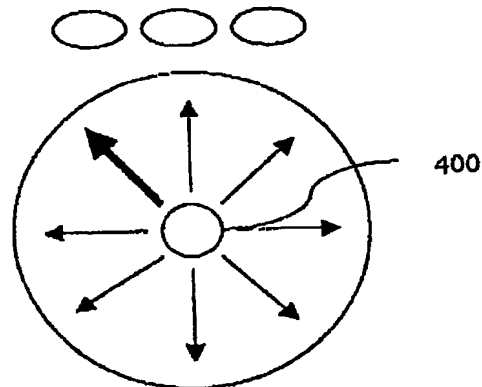
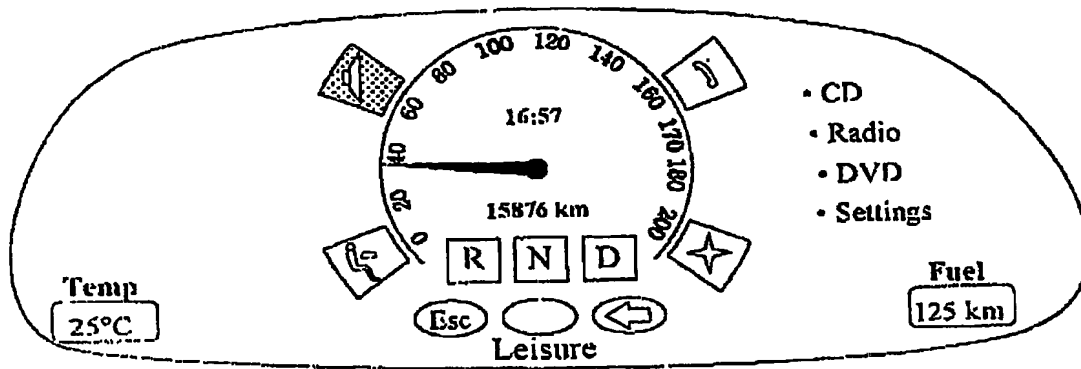


Fig. 6

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.